



FEIS96-E and FDIS96-E Meter with Limit Contact

E-line FEIS96-E and FDIS96-E can signal minimal and maximal setting limits (MIN and MAX). The meter is provided with two output relays of 600 VA switching power. Setting over or under the limits is displayed with a LED on the meter scale. DC or AC currents or voltages, frequency and temperature can be signalized.



Order information

Customer specific products*

Please create the ordering information by combining one parameter out of each column.

Scale	Ratio of trans-former (ac) or measuring range (dc)	Auxiliary supply
Please specify the requested scale value	Possibilities on request	230V 110V 24Vdc

For example:


FEIS96-E 250/1A, -50-0-400kW, 24Vdc

FDIS96-E 4-20mA, -50-0-400kW, 24Vdc

* On request the FEIS-E and FDIS-E can be delivered as IP55 or with extra markings on the scale.

Please contact our sales department for the possibilities.

Dimensions

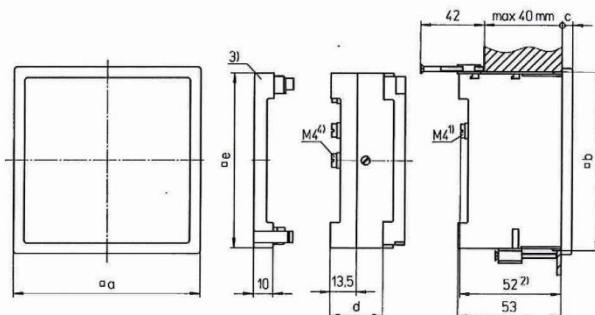

Technical specifications

<i>Environmental conditions</i>	
Location:	Indoor use
Operating temperature range:	0 .. 55°C
Relative humidity:	≤ 75% yearly average, non condensing
Protection degree:	Case IP52, terminal contacts IP20** IEC348, DIN57411
Safety class II in accordance to	
<i>Inputs</i>	
DC voltage and DC current inputs	On request
AC voltage, current and frequencies	On request
Thermocouple	On request
<i>Outputs</i>	
Signaler has two output relays.	
Switching element:	Potential free alternating relay contacts. Maximum switching power at resistive load: ≤ 600VA (≤ 3A, ≤ 250V)
Output Channel I:	Adjustable by MIN limit value
Output Channel II:	Adjustable by MAX limit value
<i>Power Supply Connecting</i>	
Signaller is constructed for power supply	230V ± 10% 45 .. 65 Hz or 110V ± 10% 45 .. 65 Hz or 24 Vdc
Power Consumption:	2 VA

** IP20 when included protection cover is mounted.

Model	a(mm)	b(mm)	c(mm)	d (mm)	e(mm)
FEIS96-E	96	92 ± 0.8	5.5	27.3	90
FDIS96-E	96	92 ± 0.8	5.5	27.3	90