

UIS-E Hour Meters

E-line hour meters show operation time of machines, equipment and other devices. When you need accurate information for testing, maintenance or warranty purposes, choose from our wide range of ELEQ hour meters.

AC applications: business machines, control panels, compressors, generators, pumps, air conditioning.

DC applications: garden and farm equipment, gen-sets, construction equipment.



Order information*

Model	UIS72-E	UIS96-E
50Hz		
230V	323801E	326966E
400V	325158E	326967E
60Hz		
230V	320474E	320475E
DC		
6-30Vdc	320579E	320581E


*UIS48 available on request.

Technical specifications

<i>Environmental conditions</i>	
Location:	Indoor use
Nominal temperature range:	-20°C .. +70°C
Relative humidity:	5% .. 80%, non condensing
Protection degree:	Case IP40, IP20**
<i>Specifications AC</i>	
Operating voltage:	24V, 48V, 60V, 110V, 120V, 230V, 240V, 400V (±10%)
Frequency:	50Hz, 60Hz
Number of digits:	5 integers, 2 decimals
<i>Specifications DC</i>	
Operating voltage:	6-30V, 10-80V, 110V (±10%)
Number of digits:	6 integers, 1 decimal

** IP20 when included protection cover is mounted.

Dimensions

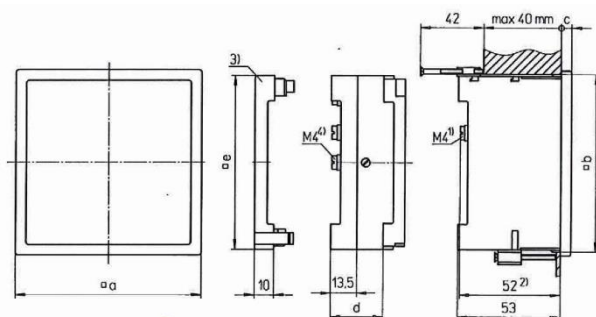

Model	a(mm)	b(mm)	c(mm)	d (mm)	e(mm)
UIS72-E	72	68 ^{+0,8}	5,5	-	66,5
UIS96-E	96	92 ^{+0,8}	5,5	-	90

