
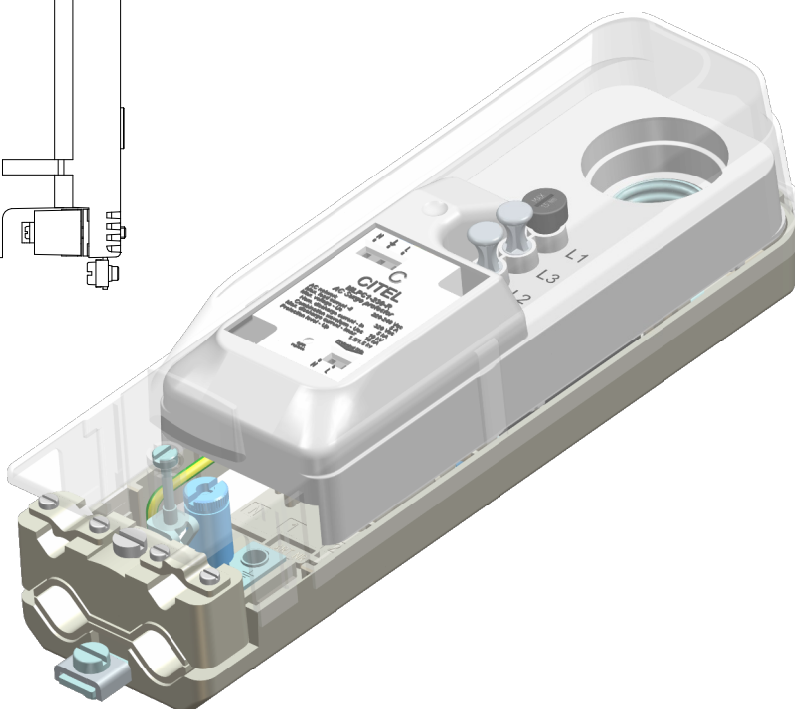

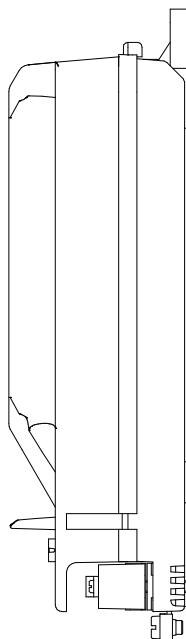


LS-94

5L2411

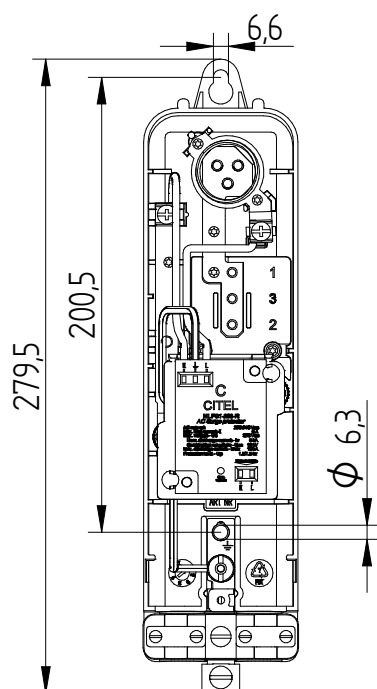

Specifications

Type : LS-94
Article number : 5L2411

Technical specifications

Minimum inside diameter : 94mm
Looping through : Yes
Suitable for : 1x E27 Fuse (DII)
Including fuse : No
Number of terminals : 5 Pcs; 3x phase, zero, Earth
Max. wire cross section : 2x 10mm² or 3x 6mm²
Strain relief : Yes, max. 2 ground cables
23 mm and 2 lightmast cords
Earth-neutral connection : No
Automatic Earthing : Yes

Details

Phase selectable

Details Surge Protection

Citel MLPC1-230L-R
Protection level 10kA/10kV
Luminair can be connected inline or parallel
Spring terminal connection for max 1,5mm²
Please consult www.citel.fr for more information about the MLPC1-230L-R

Packing

20 Pcs in a box or 480 Pcs per pallet

Use

Suitable for lightpoles and stainless steel boxes