ELEQ \ mastering electricity worldwide

# LS-100
5L8012

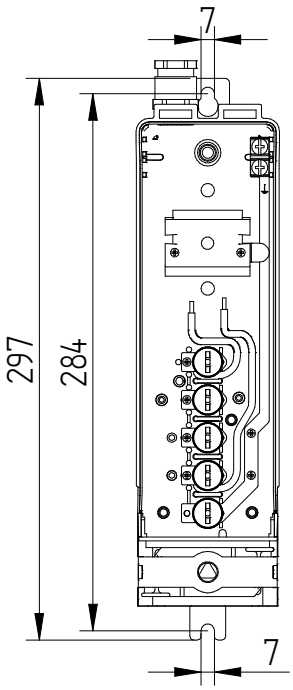


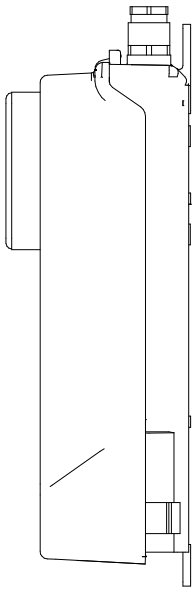

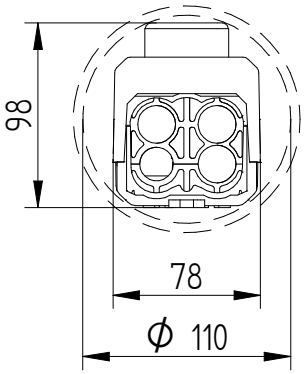


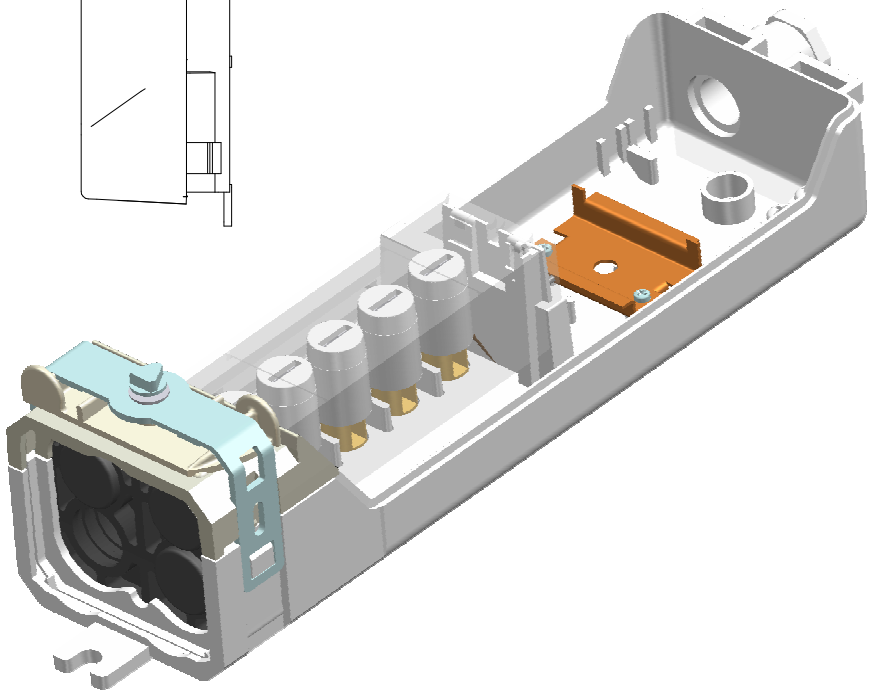

**Specifications**

| | |
|---|---|
| Type | : LS-100 |
| Article number | : 5L8012 |

**Technical specifications**

| | |
|---|---|
| Minimum inside diameter | : 110 mm |
| Looping through | : Yes |
| Provided with | : 1 x Swivel M20 |
| Number of terminals | : 5 Pcs; 3x phase, zero, Earth |
| Max. wire cross section | : 2x 16mm² |
| Strain relief | : Yes, max. two ground cables 23mm and 2 lightmast cords |
| Earth-neutral connection | : No |
| Double insulated | : Yes |
| Protection | : IP55, IK10 |

**Details**

Increased lid
Suitable for DIN rail components

**Packing**

12 Pcs in box or 216 Pcs per pallet
Deliverable from stock

**Can be combined with**

| | |
|---|---|
| 5L9970, 71, 72 | : Profile for LS-100 |
| 5L9950 | : Cable bending tool |
| 5L9960 | : Triangle key for LS-100 |



ELEQ b.v.
P.O. Box 12, 8330 AA Steenwijk
Tukseweg 130, 8331 LH Steenwijk
The Netherlands

+31 (0) 521 533 333
+31 (0) 521 533 391
info @ eleq.com
www.eleq.com